

VOL. XXXV.

HONOLULU, HAWAII TERRITORY, THURSDAY, MARCH 20, 1902.

PRICE FIVE CENTS.

## OPERA HOUSE

Saturday Evening, Mar. 22

AFTERNOON AND EVENING.  
MATINEE AT 2 P. M.

## Grand Production

OF A SERIES OF INTERESTING INCIDENTS IN

## Ancient Hawaiian History

Adapted for the stage by the Hawaii Dramatic Company, to be presented in English by Native Hawaiians on Saturday evening, will be produced a melodrama in two acts, entitled

## The Lady of the Twilight

New Scenes! New Costumes! New Songs!

A musical interlude by the Company.

PART IV.

LANDING OF LONO AND HIS WIFE. Characters by the Company. A scene of realistic accuracy has been specially designed and painted for these representations.

Reserved Seats

to be had at Wall, Nichols &amp; Co.

## For Diabetics

## GLUTEN WAFERS

AT

## LEWIS &amp; CO.

LIMITED.

Leading Grocers

1069 FORT ST.

240-Two Telephones-240

## No More Dread

## OF THE Dental Chair

## New York Dental Parlors

THE DENTAL SPECIALISTS.

All examinations are free. We will tell you in advance exactly what your work will cost.

NO PLATES REQUIRED

We use the best materials—teeth, rubber, etc., and all work is fully guaranteed to be entirely satisfactory. Any work that should not prove satisfactory will be attended to free of charge.

All our instruments are thoroughly sterilized, and every napkin antiseptic.

Hours: 8 a. m. to 5 p. m.; Sundays, 10 a. m. to 12 m.

Room 4, Elite Building, Hotel St. Ladies in attendance.

WE HAVE IDEAS

That are worth more than money to those desiring the best

## Photographs

We have the experience and the facilities to carry our ideas into execution.

Come and see our samples.

## Rice &amp; Perkins

PHOTOGRAPHERS,

Oregon Block Entrance on Union Street.

NOTICE.

ALL PERSONS HAVING CLAIMS against the Austin Publishing Company will please present the same, certified, at the office of Andrews, Peters &amp; Andrade, Stangenwald building, between April 1, 1902.

ANDREWS, PETERS &amp; AN-

DRADE,

Attorneys for the Austin Publishing Company.

By order of the President. 6120

A SPECIAL MEETING OF THE stockholders of the Austin Publishing Co., Ltd., is called for Wednesday, April 2, 1902, at the office of M. F. Robinson, Stangenwald building, Honolulu, at 2:30 p. m. for the purpose of taking action in regard to the liquidation of the company's affairs, and for such other business relating thereto, and any other business which may come up at said meeting.

By order of the President. 6120

THE PUBLIC WILL VISIT THE NEW HACKFELD BUILDING TOMORROW

The public will be received at the New Hackfeld building on Friday, the 21st from 10 A. M. until 4 P. M., and from 7:30 P. M. to 9 P. M. Ladies are especially included, the evening being a good time for them to come.

THE mercantile and shipping firm of H. Hackfeld &amp; Co., Limited, which was founded in Honolulu by Captain Henry Hackfeld in the year 1849, have recently completed the erection of their new and substantially elegant three-story and basement structure, located on the principal thoroughfare of the city, Fort street, having a frontage of two hundred and nine feet thereon, comprising the whole block between Queen and Halekuanā streets, and fronting one hundred and twelve and one hundred and two feet respectively on the two latter streets. These three facades are of solid native blue stone, of particularly fine quality and even color, and this building is the first instance wherein the native stone has been worked up to its possibilities by skilled carvers, the result proving it equal to the best building stone quarried on the mainland. There are some very large stones embodied in the fronts, notably the one from which the pediment over the Fort street entrance was hewn, it being sixteen feet long and three feet high, weighing seven tons. All of the stone is of basalt formation and was taken from the quarries of Fred Harrison, the contractor for the building. There have been from 50 to 100 men almost constantly employed for more than two years, work having been commenced in November, 1899, quarrying and dressing stone and in the construction and finishing of the building, thus distributing a large sum of money amongst the working population of Honolulu.

The style of architecture is Italian Renaissance, subordinated to modern requirements, architectural prominence being given to the entrances at each street corner, as well as in the center of the Fort street facade. In addition to these is a private entrance to the Consular rooms opening off Queen street. These entrances are flanked by massive fluted columns with moulded bases and carved caps supporting ornately carved pediments and entablatures, and the circular corner on the intersection of Fort and Queen streets is surmounted by a copper dome of stately proportions.

All entrance vestibules are richly wainscoted in marble, with marble mosaic floors intricately inlaid, the ceilings being executed in San Domingo mahogany deeply calissoned and moulded, and the doors and sidelight frames are in the same wood elaborately carved. All openings in the street fronts are glazed with polished plate glass. The same seems to have been attained in the treatment of the Public Office lobby, which is a domed rotunda 36 feet in diameter, with walls, pilasters and columns of polished St. Beaume marble, the counters being of the same material, surmounted with solid bronze grilles and wicket enclosures of design and material unexcelled by the finest banking equipment to be seen in New

York. The domed ceiling of this lobby is frescoed in design and color scheme harmonizing with the rich fittings before mentioned, the Corinthian capitals and the enriched cornice being in bronze.

Opening on this Public Office lobby and extending easterly therefrom lies the north wing of the building, containing on the first floor the principal clerical and cashier department with burglar proof money vault with time lock and crane device, and three large fireproof book vaults furnished by the Diebold Safe &amp; Lock Company, the steamship offices for the Pacific Mail Steamship Company, the Occidental and Oriental Steamship Company, Toyo Kisen Kaisha Steamship Company, and the American-Hawaiian Steamship Company lines, and the special offices devoted entirely to the German Consulate. These latter apartments are detached from the business offices of the firm, and have their separate entrance from Queen street, and comprise a spacious suite of rooms paneled in antique oak, with frescoed walls and ceilings.

From the Public Office lobby in a southerly direction extends the corridor eight feet wide with marble mosaic floor flanked on each side with oak paneled wainscoting, and communicating with the passenger elevator and main staircase at the intersection with the vestibule of the Fort street entrance. Facing the corridor on the west is the oak and bronze counter front of an additional bookkeeping department, with vaults and private offices for the heads of various departments of the mercantile branch, while on the opposite side are the quarters of the general manager of the American-Hawaiian Steamship Company. To the south of the Fort street vestibule through a huge plate glass front may be seen the show room of the grocery department, occupying the whole width of this portion of the building.

The first floor of the south wing is devoted to the crockery and hardware department and the shipping room for merchandise, a feature being the covered asphalt driveway 25 feet wide in the rear of the building, extending through from street to street, and off which also open three immense warehouses of the firm.

In the construction of this edifice great precautions have been taken to make it practically fireproof. The floors are supported on fireproofed iron columns and steel beams, and wherever wood construction has been used, it has had all hollow spaces filled with mineral wool and overlaid with asbestos fabric, and all plastering is done on expanded iron lathing, completely preventing the passage of fire. The staircases are of cast and wrought ornamental iron with slate treads. The whole area covered by the structure is divided into three approximately equal areas by two interior brick walls extending from the basement up through the roof. The openings through these walls are equipped with fireproof steel overhead rolling shutters closing down on cement thresholds, thus entirely disconnecting each section of the building at will, and all window openings in the rear walls are likewise provided with these modern and easily operated shutters. The interior of the building on each story is provided with patent automatic hose reels of the latest pattern, and the rear of the building equipped with fire escapes and four inch stand pipes with Siamese hose connections on each story and roof.

The entire building, both in construction, design and adornment, evidences great architectural ability on the part of the designer, as well as a thorough understanding and acquaintance with modern requirements and possibilities in thorough building construction and planning.

The plumbing, both in finish and sanitary efficiency, is the best that human ingenuity has so far evolved, and the electrical installation for the three elevators and lighting is of the Armored Conduit system, eliminating all possibility of fire from that source, and permitting the removal and replacing of wires at any point without tearing out constructional work.

Situated on the second floor, and facing the passenger elevator from the Fort street entrance, is the large and richly decorated apartment to be used by the Chamber of Commerce of Honolulu.

The entire two upper stories are furnished with specially designed fixtures for the reception and proper display of

dry goods, hats, haberdashery, jewelry, perfumery, cutlery and the multitudinous merchandise carried by this firm, the well lighted basement being mainly devoted to storage of merchandise. The excellent arrangement of the building, with its ample elevator service, comprising two large electric freight and one passenger elevator installed by the Otis Elevator Company, will effect a great saving in the handling of goods, and the well lighted display rooms, aside from the magnificence of the first story administrative department, makes it well nigh impossible to name a mercantile firm in the United States so well housed.

The whole of the work, in its minutest details, was executed from drawings prepared by O. G. Traphagen, the architect of the building.

W. BEAKBANE—Card Engraving and Stamping; room 3, Elite building.

INSURANCE.

THE MUTUAL LIFE INSURANCE CO. OF NEW YORK.

S. B. ROSE, Agent, Honolulu.

MUSICIANS.

ANNIS MONTAGUE TURNER—"Mignon." 1024 Beretania St.

COOK'S MUSIC SCHOOL—Love bldg., Fort St. Its methods are the result of 30 years' experience in teaching.

PHYSICIANS.

DR. JENNIE L. HILDEBRAND.—Office, 248 Beretania ave.; telephone Blue 821.

DR. W. HOFFMANN.—Beretania St., opposite Hawaiian Hotel. Hours, 9 a. m. to 11 a. m.; 1 to 3, and 7 to 8 p. m. Phone White 481.

DR. T. MITAMURA.—Office, 1468 Nuuanu St.; Tel. White 152; office hours, 8 to 10 a. m., and 6 to 8 p. m., except Sundays.

W. G. ROGERS, M.D.—Eye, Ear, Nose and Throat; 1146 Alakea St.

DR. J. UCHIDA.—Physician and Surgeon; office, Beretania, between Fort and Nuuanu streets; office hours, 8 to 12 a. m., 7 to 8 p. m.; Tel. 1211 White.

UNDERTAKERS, EMBALMERS.

TOWNSEND UNDERTAKING CO.—283 Beretania St.; Phone Blue 571.

The Pacific Hotel

1182 Union St., Opp. Pacific Club.

Newly furnished Rooms, mosquito-proof, electric lights, hot and cold water. First-class Table Board.

MRS. HANA, Proprietor.

NEW ORPHEUS RESTAURANT

1258 Fort Street.

BEST MEALS, CLEANEST TABLES AND QUICKEST SERVICE IN HONOLULU.

Prices Reasonable.

New Territory Restaurant


JUST OPENED

IN THE NEW BUILDING OPPOSITE CLUB STABLES.


Meals 25c. Tickets, \$4.50.

Everything First-class.

## THE PUBLIC WILL VISIT THE NEW HACKFELD BUILDING TOMORROW

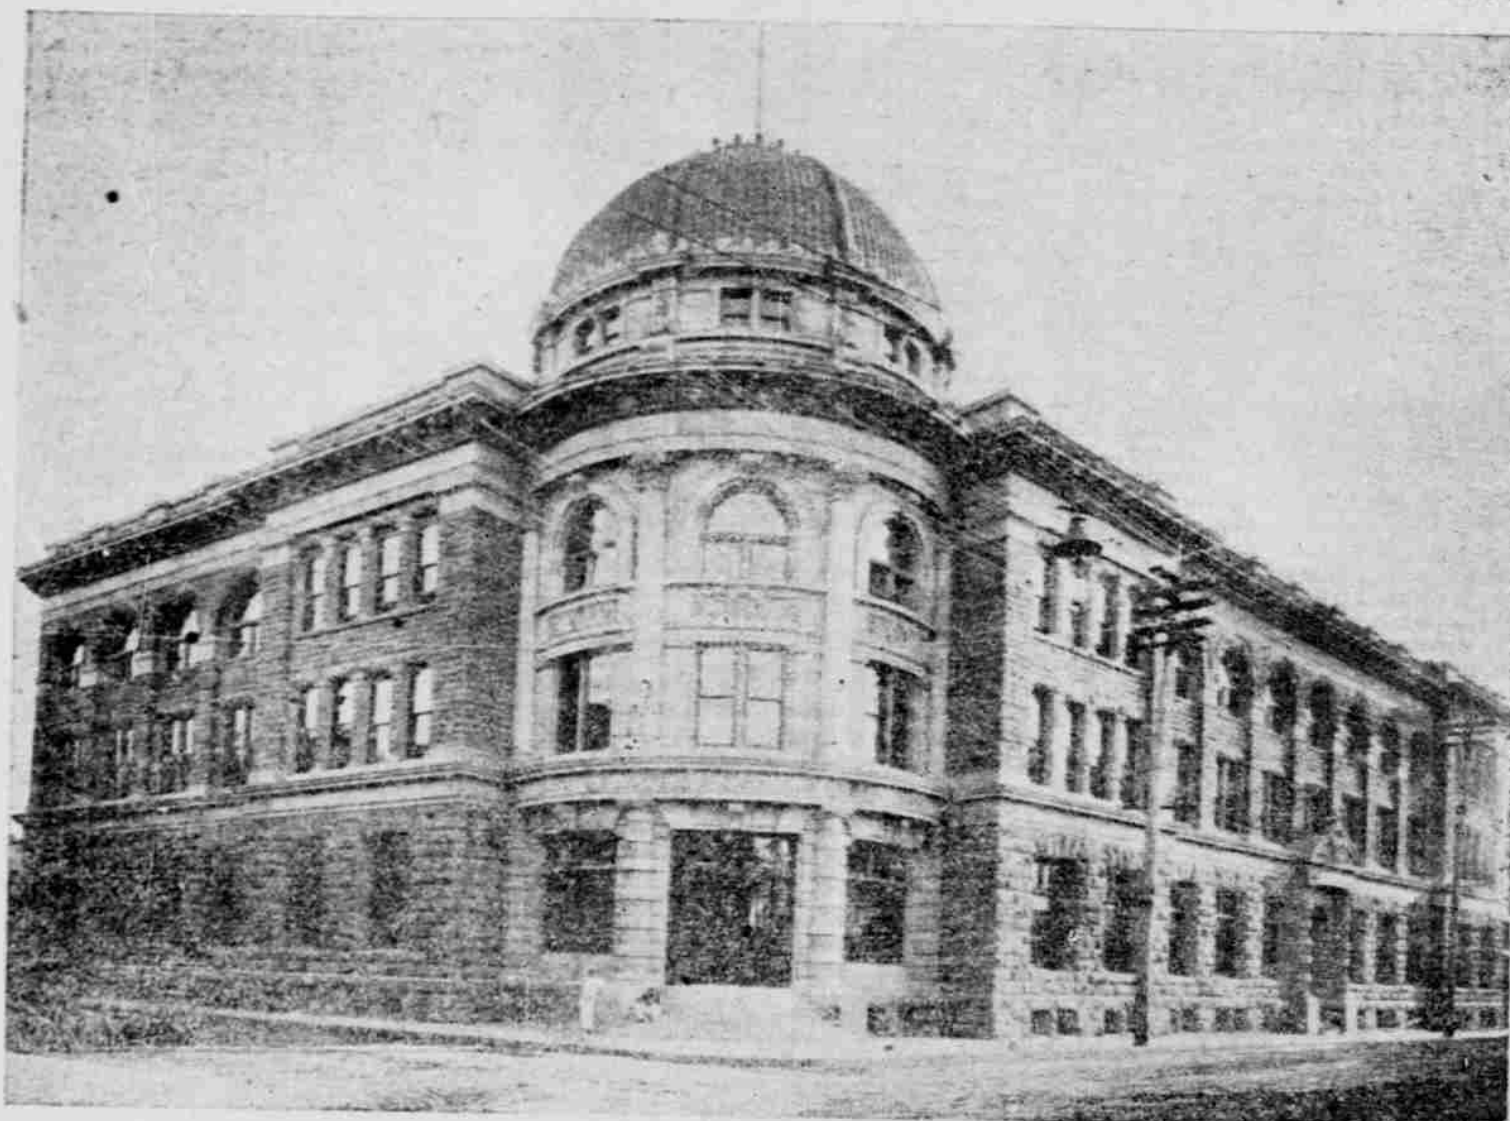

THE MAIN ENTRANCE.

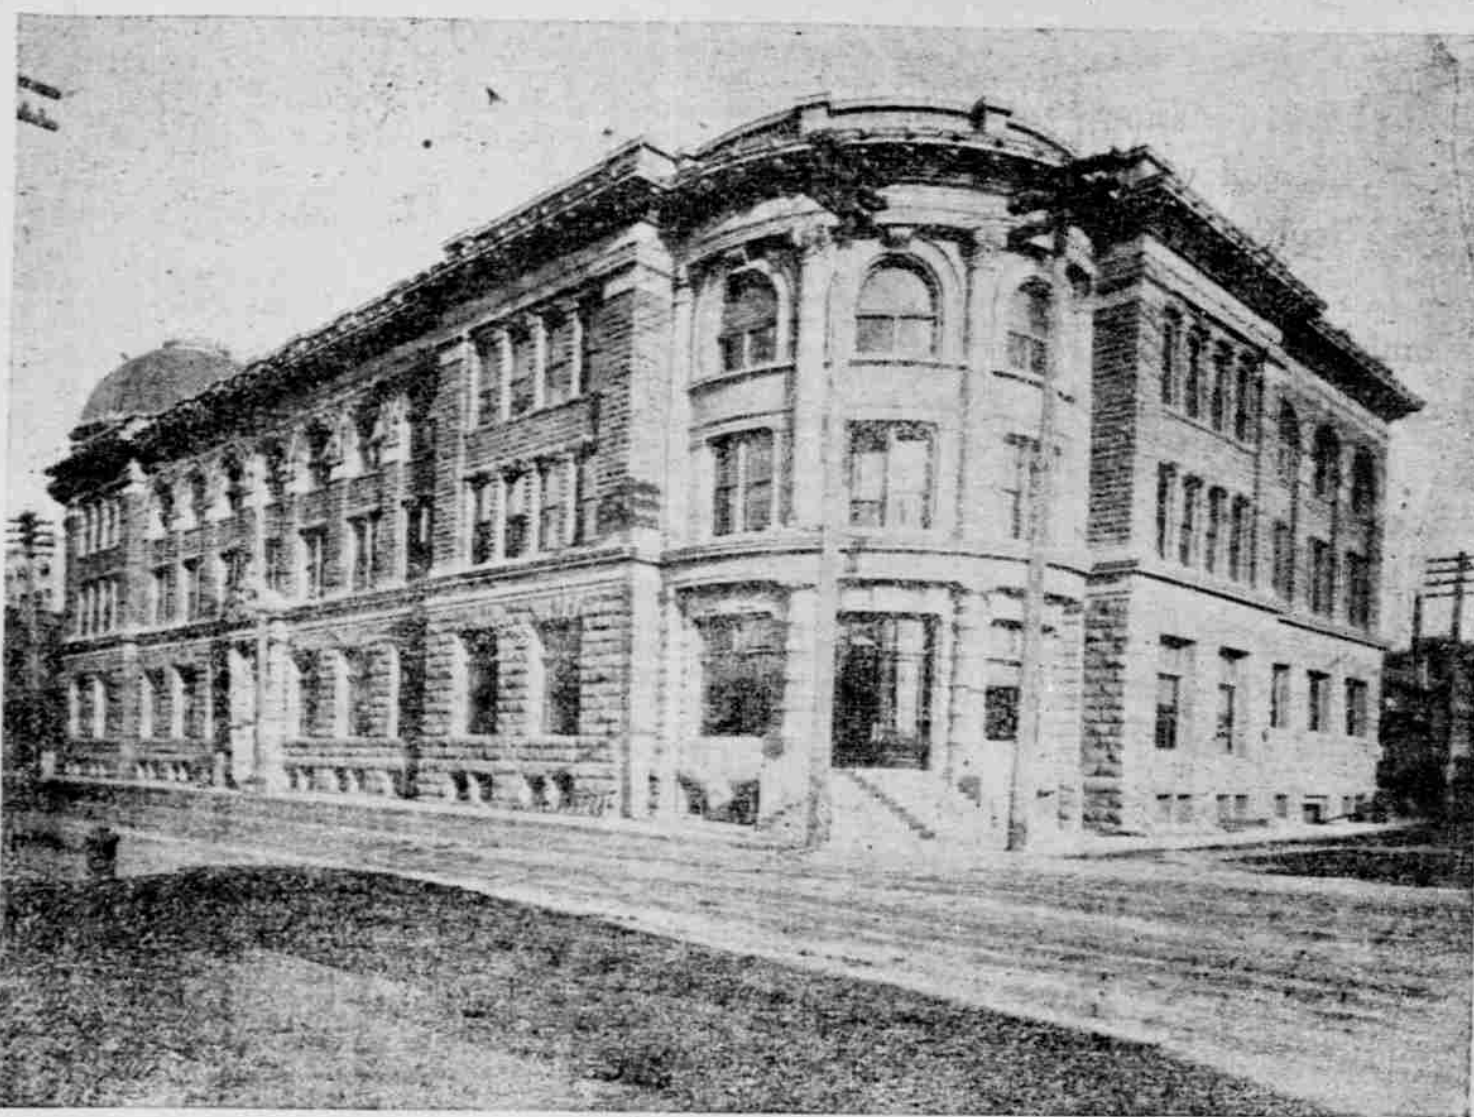

MERCHANDISE ENTRANCE.

SEND FOR FREE  
ILLUSTRATED  
CATALOGUE OF  
LADIES', CHILDREN'S  
AND INFANTS'  
WEAR

GOODS OF QUALITY  
EXCLUSIVE NOVELTIES  
REASONABLE PRICES

I. MAGNIN & CO.  
910-922 MARKET ST.  
SAN FRANCISCO, CAL.

MINERAL WATER  
IN SYPHONS.Vichy,  
Kissingen,  
Seltzer,  
Lithia and  
Waukesha.

DELIVERED TO ANY PART OF THE CITY.

Half dozen Syphons in box, 75c.  
Also, all kinds of Soda Water  
delivered at 35c per dozen.

## Hawaiian Soda Works

Emma St., near Vineyard.

PHONE BLUE 1871.

## NOTICE

A SPECIAL MEETING OF THE stockholders of the Austin Publishing Co., Ltd., is called for Wednesday, April 2, 1902, at the office of M. F. Robinson, Stangenwald building, Honolulu, at 2:30 p. m. for the purpose of taking action in regard to the liquidation of the company's affairs, and for such other business relating thereto, and any other business which may come up at said meeting.

By order of the President. 6120

HERPICIDE

BEAUTY IS NEVER COMPLETE

without a thick, luxuriant head of soft, glossy hair, which is in truth a woman's crowning glory. The faithful use of Newbury's Herpicide never fails to produce hair of this character, for, by destroying the deadly germs that feed upon the oil of the hair root, it makes dandruff, falling hair and all scalp diseases impossible. It then promotes a new and thick growth to replace the old thin, brittle hair.

One bottle will verify these statements. For Sale at all First-Class Drug Stores.

HOLLISTER DRUG CO., LTD., Agents.